


GLB

热缩低压指套

性能特征

- ◎ 2-3:1 收缩比
- ◎ RoHS 认证

模具制件

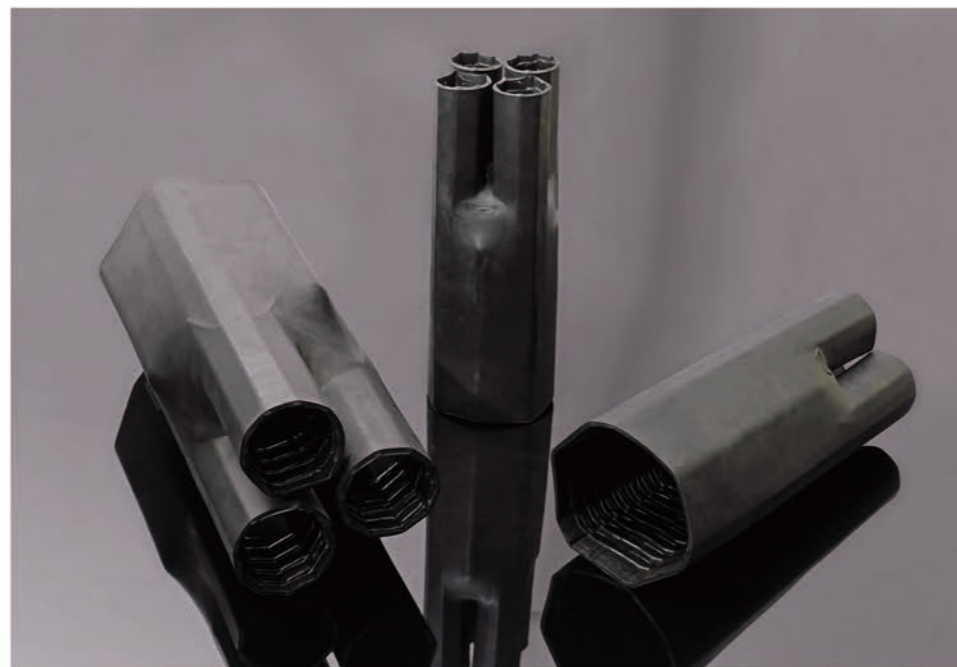


主要技术指标

| 测试项目 | 测试方法 | 性能指标 |
|-------------------|-------------|----------------------------|
| 拉伸强度 | ASTM D 2671 | 12MPa (最小) |
| 断裂伸长率 | ASTM D 2671 | 200% (最小) |
| 体积电阻率 | IEC 93 | 10 ¹⁴ Ω.cm (最小) |
| 介电强度 | IEC 60243 | 12kV/mm (1.0 mm) (最小) |
| 吸水率 | ISO 62 | 0.5% (最大) |
| 热冲击 (225°C /4 小时) | ASTM D 2671 | 无裂纹, 无滴流 |
| 密度 | ASTM D 792 | 1.0~1.1g/cm ³ |

订购信息

| 颜色 | 标准 | 黑色 |
|------|------------------------------------|----|
| 订购说明 | 说明产品名称, 尺寸和颜色 (例如: GLB3C-70/28 黑色) | |

产品规格

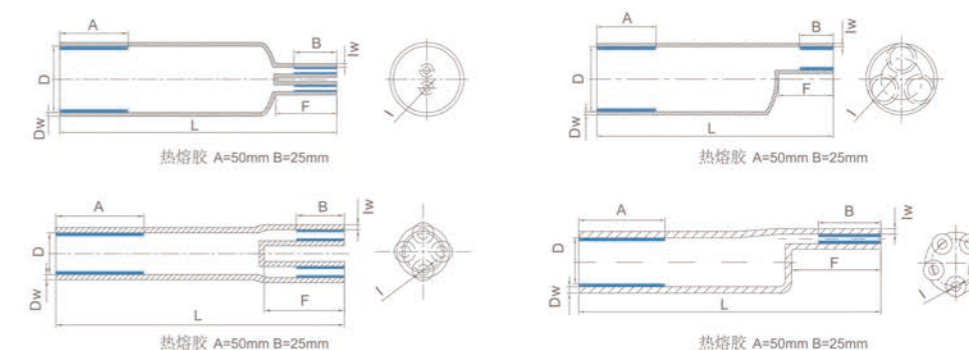

| 尺寸 (毫米) | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | |
|--------------|-----|-----|------------|------------|------------|------------|-----|-----|-----|-----|---|--|
| | I* | f* | a* (最小) | b* (最大) | a* (最小) | b* (最大) | L | F | Dw | Iw | I | |
| 2 指套 | | | | | | | | | | | | |
| GLB2C-22/8 | 55 | 16 | 22 | 12 | 11 | 3.5 | 60 | 18 | 2.2 | 1.8 | | |
| GLB2C-30/12 | 80 | 22 | 30 | 14 | 14 | 4.5 | 84 | 21 | 2.6 | 2.4 | | |
| GLB2C40/16 | 100 | 30 | 40 | 16 | 15 | 5.0 | 110 | 30 | 2.2 | 2.2 | | |
| GLB2C-60/23 | 95 | 21 | 60 | 23 | 25 | 8.0 | 105 | 25 | 2.4 | 2.4 | | |
| GLB2C-90/60 | 165 | 45 | 90 | 60 | 30 | 8.0 | 170 | 48 | 3.0 | 3.0 | | |
| GLB2C-160/90 | 290 | 170 | 160 | 92 | 50 | 30 | 310 | 160 | 4.5 | 4.5 | | |
| 3 指套 | | | | | | | | | | | | |
| GLB3C-38/16 | 100 | 35 | 38 | 16 | 15 | 5 | 110 | 30 | 2.3 | 2.0 | | |
| GLB3C-60/25 | 170 | 40 | 60 | 25 | 26 | 8 | 175 | 45 | 3.2 | 2.8 | | |
| GLB3C-70/28 | 175 | 45 | 70 | 28 | 32 | 10 | 180 | 45 | 3.3 | 3.0 | | |
| GLB3C-80/38 | 190 | 50 | 80 | 38 | 34 | 16 | 195 | 55 | 3.5 | 3.3 | | |
| GLB3C-110/50 | 220 | 55 | 110 | 50 | 46 | 19 | 230 | 60 | 3.8 | 3.5 | | |
| GLB3C-125/57 | 230 | 58 | 125 | 57 | 55 | 20 | 240 | 65 | 3.7 | 3.3 | | |
| GLB3C-140/70 | 250 | 58 | 140 | 70 | 62 | 26 | 270 | 68 | 3.9 | 3.6 | | |
| GLB3C-170/77 | 250 | 55 | 170 | 77 | 75 | 28 | 270 | 68 | 3.9 | 3.6 | | |
| 4 指套 | | | | | | | | | | | | |
| GLB4C-40/15 | 95 | 23 | 40 | 15 | 12 | 5.0 | 100 | 24 | 2.2 | 2.0 | | |
| GLB4C-55/21 | 145 | 40 | 55 | 21 | 20 | 5.5 | 150 | 42 | 2.9 | 2.7 | | |
| GLB4C-65/26 | 170 | 45 | 65 | 26 | 25 | 7.5 | 180 | 50 | 3.3 | 3.1 | | |
| GLB4C-75/26 | 180 | 45 | 75 | 26 | 28 | 7.5 | 190 | 50 | 3.3 | 3.1 | | |
| GLB4C-82/37 | 170 | 46 | 82 | 37 | 30 | 11 | 180 | 45 | 3.3 | 3.0 | | |
| GLB4C-90/37 | 170 | 46 | 90 | 37 | 32 | 11 | 180 | 50 | 3.3 | 3.0 | | |
| GLB4C-100/47 | 180 | 55 | 100 | 47 | 38 | 12 | 190 | 55 | 3.9 | 3.3 | | |
| GLB4C-125/52 | 215 | 50 | 125 | 52 | 50 | 15 | 240 | 68 | 4.0 | 4.0 | | |
| GLB4C-160/70 | 240 | 50 | 160 | 70 | 64 | 20 | 270 | 68 | 3.8 | 3.7 | | |
| 5 指套 | | | | | | | | | | | | |
| GLB5C-40/19 | 90 | 20 | 40 | 19 | 13 | 4.5 | 85 | 20 | 2.5 | 2.2 | | |
| GLB5C-55/24 | 145 | 36 | 55 | 24 | 18 | 5.5 | 150 | 40 | 3.0 | 2.6 | | |
| GLB5C-80/33 | 160 | 46 | 80 | 33 | 26 | 8 | 175 | 50 | 3.2 | 3.0 | | |
| GLB5C-100/42 | 185 | 52 | 100 | 42 | 35 | 10 | 195 | 55 | 3.5 | 3.2 | | |

I* = 供应时总长
 f* = 供应时小指长度
 a* = 供应时的内径
 b* = 收缩后内径